

GT Series : Entry Station



For faster and easier transaction

GT-2800

Ticket Dispenser & Pass Card Reader (Single Slot)

Designed as Parking Ticket Dispenser and Pass Card Reader for smooth entry transaction. Single slot utilized for both Parking Ticket and Pass Card.


The user-friendly LCD enables faster & easier access control. Anti-passback and validity check capabilities prevent unauthorized entry and protect your revenue.

GT-2800 Ticket Dispenser & Pass Card Reader (Single Slot)

GT-2700 Ticket Dispenser

Standard Features:

- Manual or automatic ticket issuance
- Allows access by Pass card, Event card, One Time Pass card, Periodical card, and Debit card (GT-2800)
- Anti-passback and validity check capabilities to prevent unauthorized entry
- Double ticket feed with a ticket capacity of 7000
- 4-way pass card reading capability (GT-2800)
- Easy-to-read Graphic LCD (320 x 240 dot)
- Stores Data in Compact Flash Memory
- OS: Windows CE 4.0 (.NET)
- RS 232C / 485, Ethernet Communication Capability
- On-line or stand-alone operation
- Compatibility with TF-2800N series, same base or anchors can be used

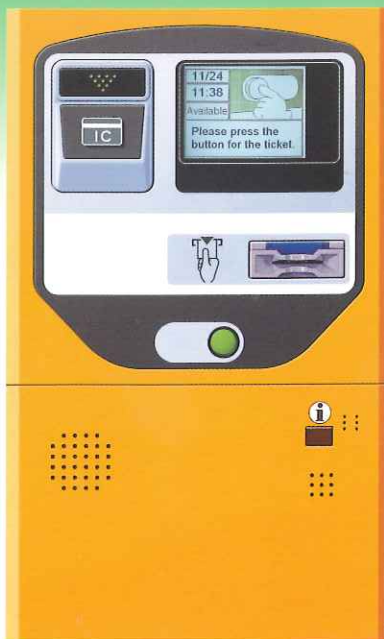

IC Card Reader is an optional feature.

User Guidance

| | |
|--------|--|
| 01/01 | |
| 14:41 | |
| Vacant | |

Please take the Parking Ticket.

Ticket Issuance

| | |
|-------|--|
| 01/01 | |
| 15:38 | |
| FULL | |

Lot is FULL now. Please wait.

Error Message

| | |
|--------|--|
| 01/01 | |
| 14:30 | |
| Vacant | |

Please press the button for the ticket. If you have a pass card, please insert the pass card.

Ticket issue button

Optional Features:

| | |
|--------|--|
| 01/01 | |
| 14:58 | |
| Vacant | |


Please present your Card.

IC card option

- Mifare Reader can be installed internally
- Interface to Credit Card Server, Credit card IN / OUT
- Displayed language selection by buttons: Maximum 3 languages
- Voice Announcement: Synchronized with the display
- Intercom for customer assistance

Specifications:

| | |
|---------------------|---|
| Main Power | 100/120, 220/240 VAC ±10%, 50/60 Hz |
| Power Consumption | 34W (standard), 340W (with optional heater) |
| Ambient Temperature | -10 to 40 °C (standard), -25 to 40°C (with optional heater) |
| Ambient Humidity | 10-90% (non-condensing) |
| Weight | 82kg |

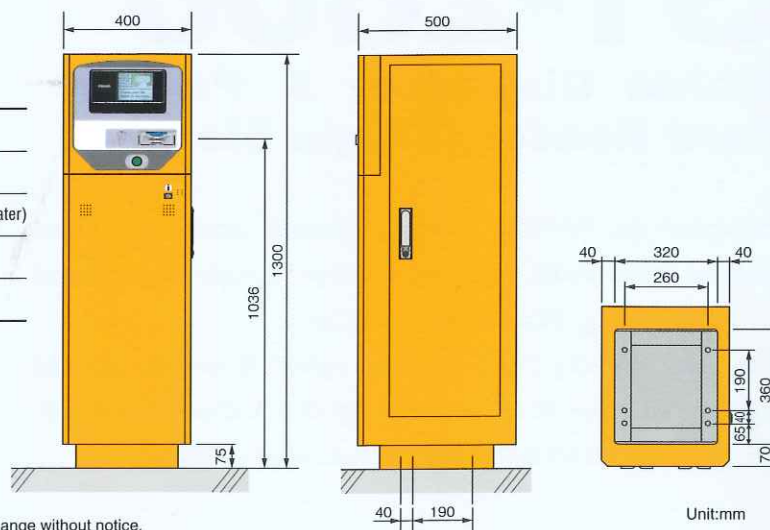

Specifications and descriptions contained in this catalog may be subject to change without notice.

Any company name and/or product name listed is a registered trademark and/or is a proprietary brand.

Distributed by:

AMANO Corporation

275 MAMEDO-CHO, KOHOKU-KU, YOKOHAMA,
JAPAN 222-8558
TEL. +81-45-439-1508 FAX. +81-45-439-1151
HOME PAGE: <http://www.amano.co.jp/English/>